



ELECTRIC FENCING FOR THE SERIOUS FARMER

500 MAINS ENERGIZER


Features

- Half Joule output mains energizer
- Suitable for all types of livestock
- LED output indication to indicate pulsing.
- Comprehensive instructions included
- Suitable for multi-wire fences up to 5km (3 ha)
- 2 year warranty
- Easily mounted on a wall, fence post or fence wire.



Model	Product Code	Market	EAN Barcode
500	811178	Australia	9414731384635

Warning: Read full instructions before use.

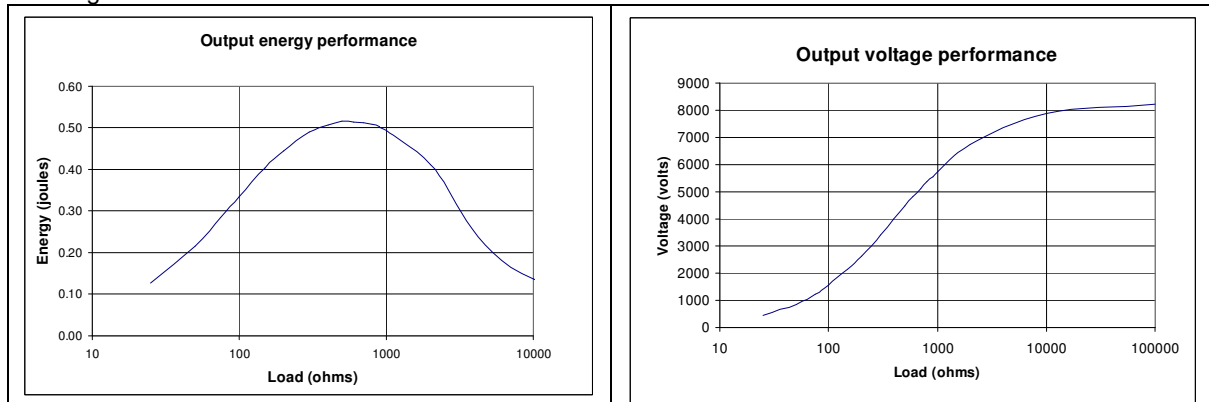

Fence conditions can have a major impact on the effectiveness of any electric fence. Fence condition is dependent upon a number of factors including fence layout, vegetation, earth conditions, age and state of repair.

PRODUCT INFORMATION SHEET

Specifications	Speedrite 500
Product size (WxHxD) Product carton size (WxHxD) Product shipper size (x5 per shipper) (WxHxD) Packaged weight per shipper (x5 per shipper)	170 x 240 x 78 mm 175 x 245 x 140 mm 430 x 265 x 250 mm 11 kg
Safety standard compliance	IEC 60335-1 with IEC 60335-2-76 AS/NZS 60335.1 with AS/NZS 60335.2.76
RFI (Radio Frequency Interference) standard	AS/NZS CISPR14.1 IEC CISPR14.1 BS EN 55014-1 BS EN 55014-2 as category 2 device
Ingress protection category	IP24
Operating temperature Rated input voltage	-15 to 50 °C 100 – 240v a.c. 50/60 Hz
Rated input power	0.7 W
Peak stored energy Peak output energy	0.68 J 0.5 J @ 500 Ω
Typical output voltage performance Open circuit Standard load (1000 Ω) Heavy load (500 Ω)	Up to 8200 V Up to 5700 V Up to 4500 V
Earth rods required	The number of earth rods required will vary depending on earth conditions

Figures are typical values



Tru-Test Limited
PO Box 51078 Pakuranga
Manukau 2140
New Zealand
Phone +64 9 978 8888
Fax +64 9 978 8889

Tru-Test Pty
2/2B Birmingham Ave,
PO Box 122 Villawood,
Sydney, NSW 2163
Australia
Free Phone 1-800-641-324
Free Fax 1-800-831-847



[THIS PRODUCT INFORMATION SHEET IS NOT INTENDED FOR DISTRIBUTION TO END USERS]

Although the information presented in this Product Information Sheet is believed to be accurate and reliable, no responsibility for inaccuracies can be assumed by Tru-Test Ltd. This performance data is typical only and variations due to component manufacturing tolerances are normal. Tru-Test Ltd reserves the right at any time to change performance characteristics or specifications without prior notice.